


R5-60G-KNX

The CTL-SEN-R5/6203 is a flagship human presence sensor powered by advanced 60GHz 4D mmWave radar technology. Featuring a robust 4T4R antenna array, it delivers ultra-high resolution to support complex functions, including real-time trajectory tracking, people counting, fall detection, and precise bed occupancy monitoring (in-bed/out-of-bed status). By capturing minute physiological signals (such as breathing), it ensures reliable performance within a Ø6.0-meter coverage area, making it an ideal solution for premium smart home, healthcare, and elderly care applications.

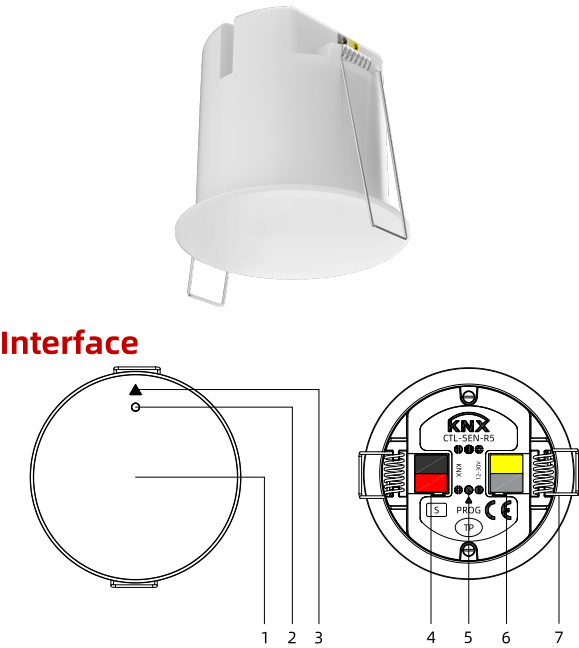

- 1. Radar Sensing Surface
- 2. Multifunction Window (LED / Illuminance Sensor / IR)
- 3. Orientation Marker
- 4. KNX Bus Port (DC 21 to 30 V)
- 5. Programming Button
- 6. Auxiliary Voltage (DC 12 to 30 V)
- 7. Spring Clip

Features


- Presence: Detects stationary presence via breathing micro-motions within 5.0 × 6.0m.
- Fall Detection: Real-time fall identification via point cloud and posture analysis.
- Bed Monitor: Tracks "in-bed" vs. "out-of-bed" status in defined zones.
- Zone Alert: Monitors boundaries (e.g., doorways) for entry/exit alerts.
- Counting: Real-time counting and location tracking for space management.
- Supports 4 independent channels for lighting control.
- Supports multiple operating modes, including Fully Automatic, Semi-Automatic, Master/Slave, and Day/Night.
- Supports parameter configuration and status readout via IR remote control.
- Built-in logic functions with support for manual mode and independent event outputs.

- Supports external inputs to dynamically modify parameter characteristics.
- Offers selectable Easy (quick start) and Advanced (multi-channel output) modes.
- Supports parameter configuration and status readout via IR remote control.
- Indicator LED brightness automatically adjusts to ambient light levels.

Specifications


Communication Type	KNX TP
Input Voltage	DC 21 to 30 V
Operating Current	≤ 6 mA
Auxiliary Voltage	DC 12 to 30 V (< 3 W)
Indicator Light	RGB LED
Detection Mode	60GHz FMCW Radar
Antenna Array	4T4R
Operating Frequency	60 to 64 GHz
Transmit Power	≤ 10 dBm
Installation Method	Recessed Ceiling Mount
Mounting Height	2.0 to 3.2 m
Detection Angle	360°
Detection Coverage	5.0 × 6.0 m
Detection Range	1.0 to 6.0 m (sensor to target)
Sensitivity	0% to 100%
Illuminance Monitoring	0 to 32,000 Lux (Accuracy ±4%)
Delay Time	1 to 3,600 seconds
Product Size	Φ65 mm × 60 mm
Cutout Size	Φ55 mm
Product Weight	74.5 g
Bus Terminal	Red / Black
Power Terminal	Yellow / white
Programming button	Physical Address Assignment
Bus Connection	Φ0.6 to 0.8 mm
Operating Temperature	Indoor -20 to 45°C
Operating Humidity	< 95% RH (Non-condensing)
Storage Temperature	-40 to 85°C
Protection Level	IP20
Housing Material	PC

Detection Range

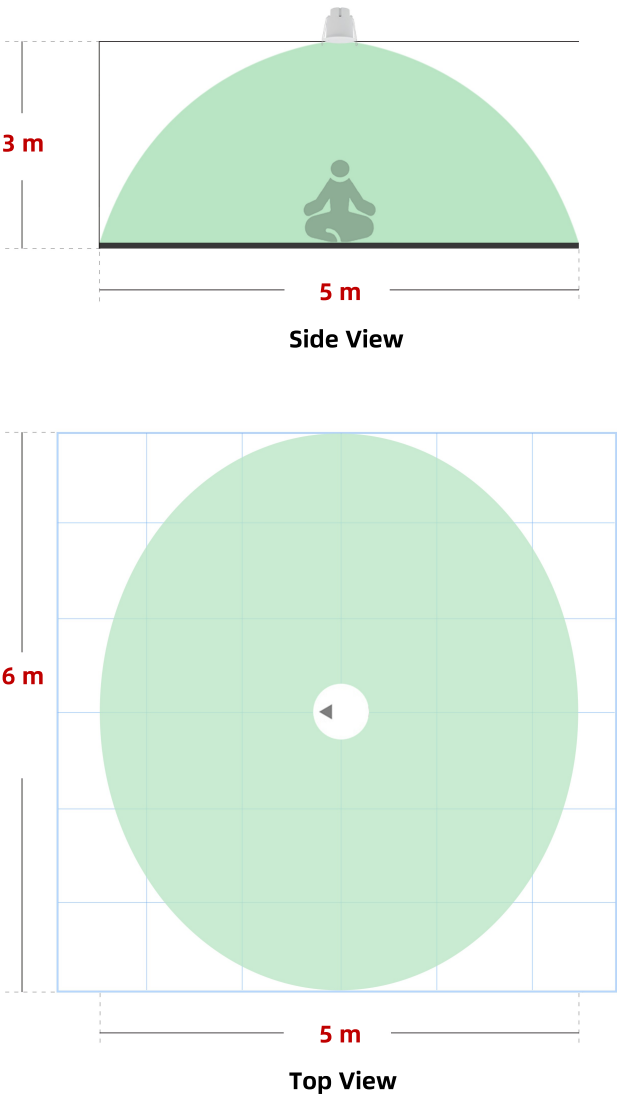

Dimensions


Recessed mount, product outer diameter 65 mm, product depth 60 mm, cutout diameter 55 mm.

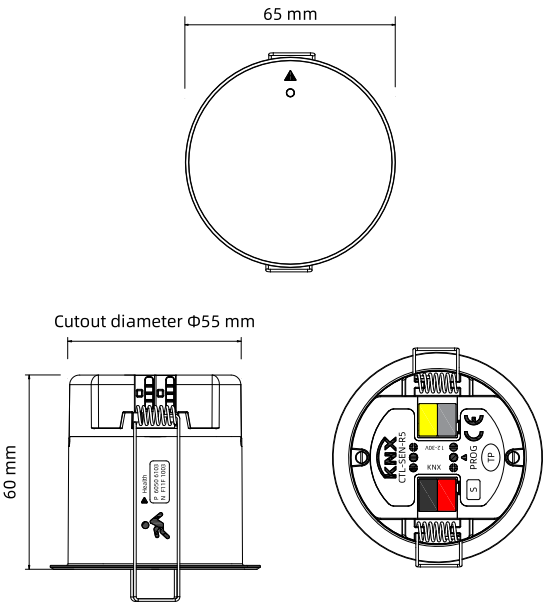

Installation Notes

- Interference Avoidance:** Avoid installing near constantly moving objects (e.g., curtains, plants) or large reflective surfaces (e.g., metal ducts, mirrors) to prevent false triggering.
- Device Spacing:** Maintain a minimum distance of 4 meters between multiple sensors to prevent mutual interference.
- Mounting:** Ensure the installation surface is vibration-free. Note that radar signals can penetrate surfaces; avoid moving objects directly behind the installation wall/ceiling.
- Wiring Safety:** Disconnect power before wiring. Use certified cables and ensure the circuit includes appropriate short-circuit and overload protection.
- Disclaimer:** Specifications are subject to change without notice. This product is an auxiliary device, not a medical instrument. The manufacturer is not liable for issues caused by improper installation or misuse.

Wiring Diagram

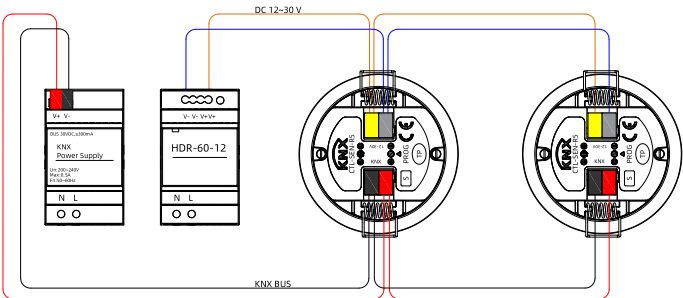

Available Accessories



Remote Control (60.99.00C1)

Ordering Information

P/N	Short Name	Model	Remarks
60.50.6203	R5-60G-KNX	CTL-SEN-R5/6203	Main Unit
60.99.00C1	RC1	RC1	Accessory