



Mini-PIR-KNX/20

The CTL-SEN-Mini/1213 Series is a compact, high-sensitivity motion sensor powered by precise Passive Infrared (PIR) technology. Designed for discreet, premium applications, it features a miniature form factor (Φ35 mm cutout) while offering a 360° detection diameter of up to 6.0 m. It integrates a high-precision lux sensor (0-32,000 Lux) for energy-efficient lighting automation.

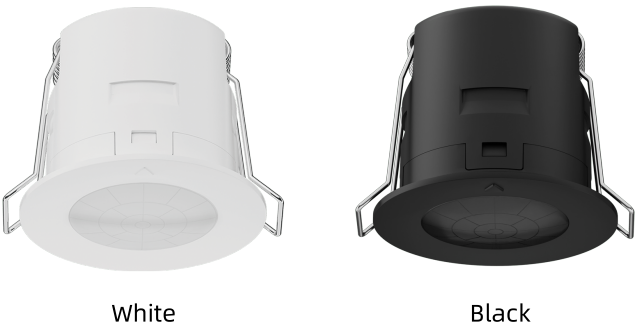

Interface

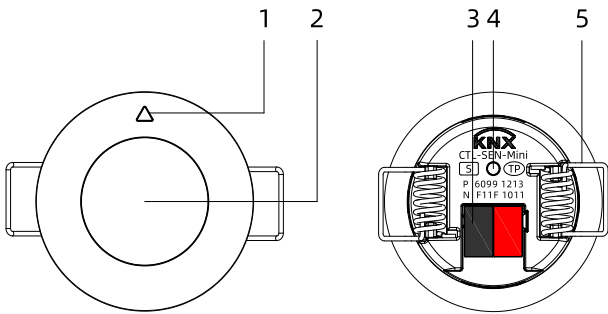

- 1. Orientation Marker
- 2. Fresnel Lens
- 3. KNX Bus Port (DC 21 to 30 V)
- 4. Programming Button
- 5. Spring Clip


Features

- Equipped with PIR motion detection.
- Quad-element PIR technology enhances radial movement detection and minimizes blind spots.
- Integrated high-precision sensor for accurate indoor illuminance monitoring.
- Supports 4 independent channels for lighting control.
- Supports multiple operating modes, including Fully Automatic, Semi-Automatic, Master/Slave, and Day/Night.
- Supports parameter configuration and status readout via IR remote control.
- Built-in logic functions with support for manual mode and independent event outputs.
- Supports external inputs to dynamically modify parameter characteristics.
- Offers selectable Easy (quick start) and Advanced (multi-channel output) modes.


Specifications

Communication Type	KNX TP
Input Voltage	DC 21 to 30 V
Operating Current	≤ 10 mA
Indicator Light	LED
Detection Mode	Pyroelectric Infrared Receiver
Installation Method	Recessed Ceiling Mount
Mounting Height	2.0 to 4.0 m
Detection Angle	20°
Detection Range	When the installation height is 3.0 m, the motion detection diameter is ≤ 6.0 m
Illuminance Monitoring	0 to 32,000 Lux (Accuracy ±4%)
Delay Time	1 to 3,600 seconds
Product Size	Φ43 mm × 35 mm
Cutout Size	Φ35 mm
Product Weight	24.5 g
Bus Terminal	Red / Black
Programming button	Physical Address Assignment
Bus Connection	Φ0.6 to 0.8 mm
Operating Environment	Indoor -20 to 45°C Humidity < 95% RH (Non-condensing)
Storage Temperature	-40 to 85°C
Protection Level	IP20
Housing Material	PC

Detection Range

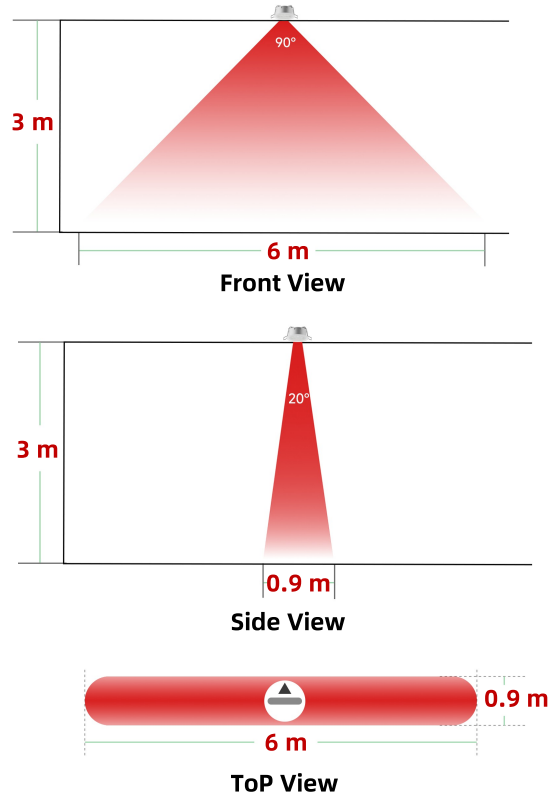


Wiring Diagram

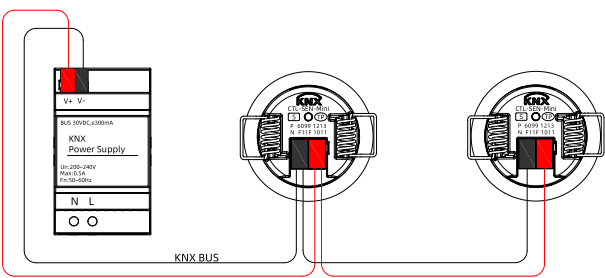

Dimensions

The product features an outer diameter of 43 mm and a depth of 35 mm, requiring a 35 mm cutout. Designed for recessed installation, it is also compatible with optional kits for surface mounting, wall mounting, or external installation via a universal bracket.

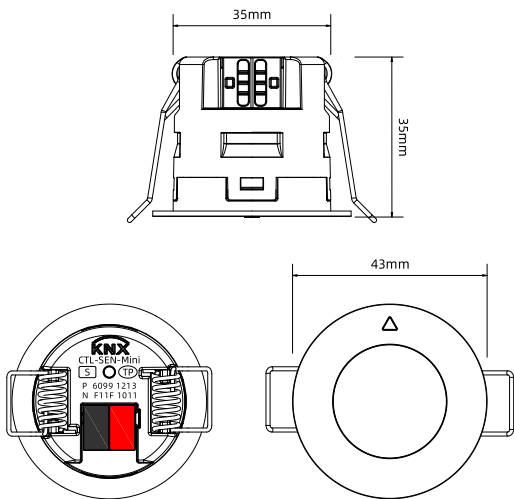

Installation Notes

Interference Avoidance: Avoid installing near moving objects (e.g., pets, swinging curtains) or areas with rapid temperature changes (e.g., AC vents, heat sources) to ensure accuracy and prevent false alarms.

Mounting & Handling: Ensure the installation surface is firm and stable to avoid vibration. Handle the device with care during unpacking and installation to prevent physical damage to the shell or circuit board.

Wiring Safety: Disconnect power before wiring. Use certified cables and strictly follow the diagram to ensure proper circuit protection.

Packaging Disposal: Dispose of packaging materials safely and immediately according to local regulations.

Disclaimer: Product specifications are subject to change without prior notice. Please strictly follow these guidelines; the manufacturer is not liable for performance issues or interference caused by improper installation.

Available Accessories



Ordering Information

P/N	Short Name	Model	Remarks
60.99.1213	Mini-PIR-KNX/20	CTL-SEN-Mini/1213	White (Default)
60.9B.1213	Mini-PIR-KNX/20B	CTL-SEN-Mini/1213B	Black
60.99.00C1	RC1	RC1	Accessory
60.99.0A55	Mini-ASSY-55	A55	Accessory
60.99.0A86	Mini-ASSY-86	A86	Accessory
60.99.0A40	Mini-ASSY-BL	A40	Accessory
60.99.0A50	Mini-ASSY-CYL	A50	Accessory
60.99.A360	Mini-ASSY-360	A360	Accessory