

Mini-ASSY-CYL

The Mini Accessories Surface Magnetic Sleeve (Mnemonic: Mini-ASSY-CYL) is an innovative surface-mount solution designed exclusively for the Creatrol Mini sensor series. Engineered for maximum flexibility, it features a minimalist design and a powerful magnetic structure that enables secure installation and "one-click" sensor replacement. This sleeve is ideal for modernizing traditional mounting methods on surfaces where recessed installation is not feasible, such as cabinetry, finished ceilings, or solid walls.




Features

- Tool-Free Maintenance: The magnetic attachment system allows for effortless sensor removal and replacement.
- Versatile Surface Mounting: Eliminates the need for complex construction or cutting recessed holes, making it suitable for various architectural surfaces.
- Minimalist Aesthetic: A sleek, cylindrical profile that blends seamlessly into modern interior environments.
- Secure Locking Mechanism: Uses a dedicated internal buckle system to ensure the sensor remains firmly engaged within the sleeve.

Specifications

Installation	Surface Mount (Ceiling/Wall/Cabinetry)
Base (Patch) Diameter	46 mm
Sleeve Body Diameter	40 mm
Profile Height	42 mm
Magnetic Patch Screw Spacing	26 mm
Internal Base Screw Spacing	18 mm
Net Weight	45 g
Material	ABS
Color	White, Black

Dimensions

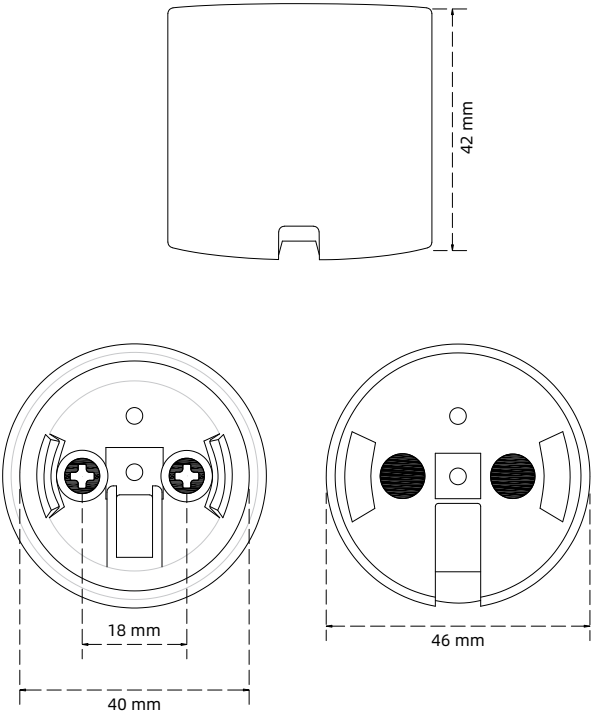

Installation Brief

1. Base Preparation Secure the magnetic patch to the intended installation point using screws and pull the embedded wiring through the provided gap.
2. Sleeve Attachment Align the notch of the sleeve with the patch. The magnetic nails on the back of the assembly will securely attach the sleeve to the mounting patch.
3. Sensor Integration Connect the wiring to the Mini sensor. Place the sensor into the sleeve vertically until the side clamping grooves click into the base buckles, confirming a stable fit.

Installation effect drawing



Ordering Information

P/N	Short Name	Model	Remarks
60.99.0A50	Mini-ASSY-CYL	A50	White
60.9B.0A50	Mini-ASSY-CYL	A50	Black