

Mini-ASSY-L90

The Mini Accessory Surface Mounting 90° Bracket is a professional-grade metal support optimized for under-desk occupancy sensing in smart office environments. Designed to be paired with the Mini Accessory Surface Mounting Socket , this bracket provides a permanent right-angle orientation, ensuring the sensor remains perfectly positioned to monitor workstation activity. Its rigid metal construction and fixed angle eliminate the risk of sensor misalignment caused by accidental contact or vibration.




Features

- Guarantees a fixed 90-degree orientation to optimize the detection field for seated occupants.
- Offers superior structural integrity compared to plastic alternatives, ideal for long-term use in shared workspaces.
- Features a dedicated rectangular cutout that aligns with the mounting socket for clean, concealed wiring.
- The fixed-angle design prevents unauthorized adjustments, maintaining consistent system data across all workstations.

Specifications

Installation	Fixed Surface Mount
Overall Dimensions	60 mm ×42 mm × 18 mm
Screw Hole Spacing	24 mm
Angle	Fixed 90 Degrees
Net Weight	22 g
Material	High-Grade Metal (Corrosion-Resistant)
Compatibility	Creatrol Mini Sensor Series

Dimensions

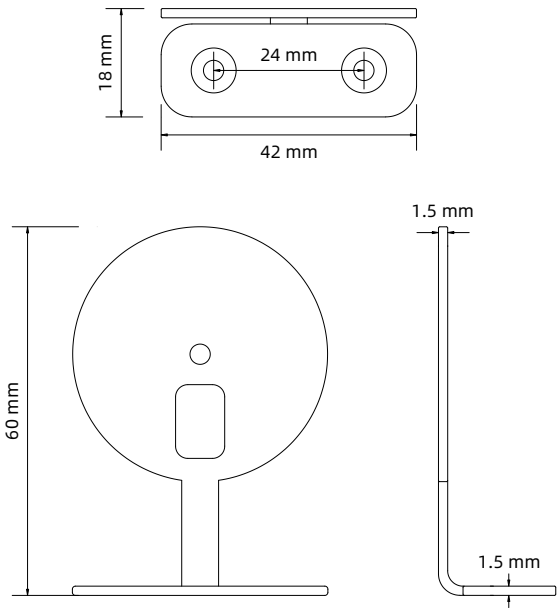

Installation Brief

1. Secure the 90-degree metal bracket to the underside of the desk surface using screws through the dual mounting holes (24 mm spacing).
2. Thread the sensor cable through the rectangular wiring hole of the bracket and attach the Mini Accessory Surface Mounting Socket to the circular mounting plate.
3. Connect the cable to the Mini Sensor and insert the sensor vertically into the socket opening
4. Align the sensor’s side clamping grooves with the internal buckles of the socket and press until an audible "click" confirms the unit is securely locked in place.

Installation Effect Drawing



Ordering Information

P/N	Short Name	Model	Remarks
60.99.0A90	Mini-ASSY-L90	A90	Accessory
60.99.0A50	Mini-ASSY-CYL	A50	Accessory